



Product Data Sheet

Product Name: Carbonil

Description: Regular strength hydrocarbon encapsulation chemical agent. Carbonil chemically binds with hydrocarbons and other oil-based chemicals. This product greatly reduces LEL levels within 12 hours of application (60% reduction within 30 minutes usually). Excellent for use as a pre-treatment for tanks needing entry with high LEL. Moderate cleaning capabilities. Contains deodorant. Moderate foaming capabilities.

Product Uses & Applications		Application Instructions	
Tank Cleaning		Dilution Rate	Up to 20:1 with water
LEL Control		Set Time	30 minutes to 24 hours
Hydrocarbon Stripping		Temperature	Warm water helps stripping
Spill Control		Special Instructions:	
Fire Prevention		For scrubbing applications, make sure product has been treated with de-foaming agent.	
Hazardous Information		Packaging Information	
Specific Hazard	Eye and skin irritant	Available Quantities	5,30, 55, and bulk quantities
Flash Point (°F)	Above 220	Packaging Material	Poly
Biodegradability	Excellent	Other Information:	
pH	10.5 to 11.5	Do not let product freeze.	
Unusual Hazards	None		
Other Information	None		

Case History / Data

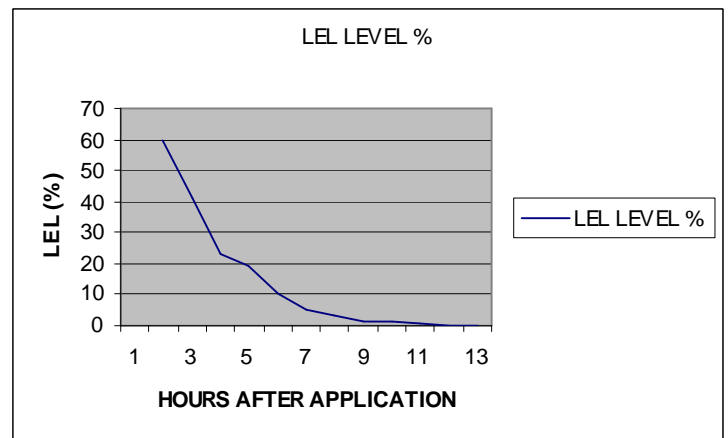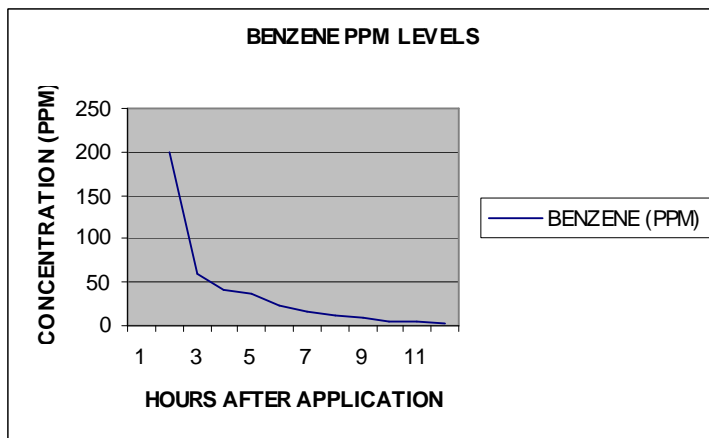

Visit us on-line at www.vapor-tech.net